


5G CPE Max 5

5G 5400Mbps | Easy Installation | 5G High Gain Antenna

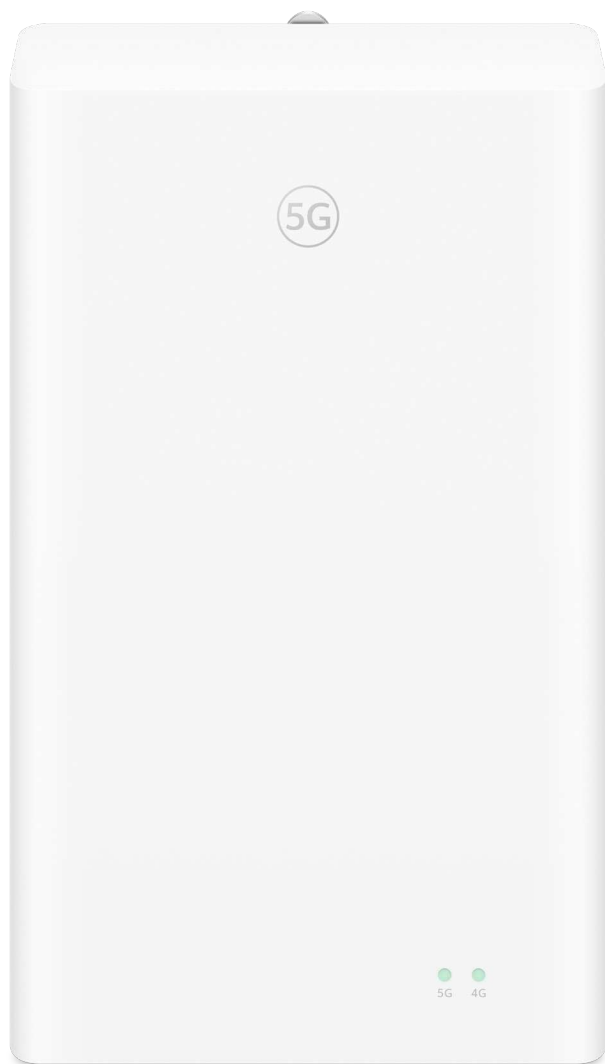

5G CPE Max 5

Product Name	5G CPE Max 5
Certified Model	H352-381
Color	White Note: For reference only, actual product colors may vary.
Dimensions	142 mm (Width) x 230 mm (High) x 58 mm (Deep) Note: The size may vary depending on configuration, manufacturing process, or measurement.
Weight	Approximately 1000 g (excluding the power adapter) Note: The actual weight may vary depending on configuration, manufacturing process, or measurement.
Appearance	LAN port (RJ45): 1 Power port: 1 Nano-SIM card slot: 1 H352 device: 1*Reset button Power Adapter (PSU) : 1*Power button, 1*Reset button 5G Signal Strength: 1 4G Signal Strength: 1
5G Data Rates	Max. DL: 5.4Gbps Max. UL: 500Mbps Theoretical value. The actual rate varies with the operator, network conditions, distance, and terminal
5G Networking Mode	NSA/SA
5G MIMOs	Downlink: 4x4 MIMO Uplink: 2x2 MIMO
4G Data Rates	Max. DL: 2Gbps Max. UL: 150Mbps Theoretical value. The actual rate varies with the operator, network conditions, distance, and terminal
4G Category	DL: Cat20 UL: Cat13
4G MIMOs	Downlink: 4x4 MIMO Uplink: 1x1 MIMO
Operating Frequency	5G: n1/n3/n5/n7/n8/n20/n28/n38/n40/n41/n75/n77/n78/n79/n80/n81/n82/n83/n84 4G: B1/B3/B5/B7/B8/B18/B19/B20/B26/B28/B32/B34/B38/B39/B40/B41/B42/B43
4G/5G Antenna Type	Built-in 5G/4G main and diversity antennas
Wi-Fi Data Rates	2.4GHz: 150Mbps (theoretical value)

5G CPE Max 5

Max. Wi-Fi Connections	32 (theoretical value)
Wi-Fi MIMOs	2.4GHz: 1×1 MIMO
Wi-Fi Antenna Type	Built-in Wi-Fi antenna, non-removable
Wi-Fi Encryption Authentication	WPA/WPA2-PSK
Wi-Fi Broadcasting and Hiding	Supported
SSID Modification	Supported
Operating Temperature	-40℃ ~ +55℃ , No solar radiation -40℃ ~ +50℃ , solar radiation
Storage Temperature	-40℃ to +70℃
Power Specification	AC: 100 V~240 V DC: 19 V/1.26 A
Power Consumption	< 24 W
Software Features	Device Management App、WebUI(Default IP Address: 192.168.118.1)、Supported Operating Systems:Windows 8, Windows 8.1, Windows 10, Windows 11 (excluding Windows RT), MAC OS X 10.12, 10.13, 10.14 and above, with the recommended hardware configuration、OTA、SMS、500 SMS Storage Capacity、Traffic Statistics、MAC Address Filtering、Anti-brute Force Cracking、Firewall、DoS Attack Protection、L2TP VPN client, PPTP VPN client、NAT、DMZ/Port Mapping、DNS、IPv6/IPv4 dual stack and IPv4 only、Easy installation
Packing List	Wireless Gateway (1, Standard) PSU (1, Standard) PSU power cable (1, Standard) Ethernet cable (Flat, 1.5m) (1, Standard) Network port prompt label (1, Standard) SSID label (1, Standard) Base (1, Standard) Screw (2, Standard) Expansion anchor (2, Standard) Adjustable pole strap (1, Standard) Cable tie (2, Standard) Outdoor Ethernet cable waterproof component (1, Standard) Internal hexagon wrench (φ2.5) (1, Standard) Internal hexagon wrench (φ5.0) (1, Standard) Quick Start (1, Standard) Ethernet cable (Flat, 10m) (1, Optional) Warranty card (1, Optional)